

Collection

LIGHT OF LIFE

Your Trusted Brand In Energy Efficient Lighting





Headquartered in Irwindale, California, USA
Incorporated in 2002

COMPANY PROFILE

Aurio Lighting, Inc.

Designed for the architectural lighting industry, Aurio Lighting, Inc.'s innovative line of energy efficient lighting products are ideal for use in Commercial, Hospitality, Institutional and Residential applications. Aurio Lighting, Inc. is a subsidiary of a world-class lighting manufacturer in China – LEDUP Enterprises, Inc. LEDUP Enterprises, Inc. is currently the largest manufacturer of seasonal lighting in China. LEDUP is currently ranked Top 5 manufacturer worldwide.

Incorporated in 2002, Aurio Lighting, Inc. is headquartered in Los Angeles, California. With combine resources of Aurio Lighting, Inc. and LEDUP we have over one million square feet of manufacturing in Anhui, China. Aurio Lighting, Inc. and LedUp are proud to employ over two thousand men and woman worldwide.

In 2006, a patent was issued to LedUp by the United States Patent & Trademark Office for the company innovated and developed "Stay-lit Circuit". "Stay-lit Circuit" is fully adapted by GE® and became the exclusive LED light set maker for GE®. Aurio Lighting, Inc. is dedicated to providing excellent energy-efficient and reliable LED lighting products to our business partners. Aurio Lighting, Inc. distributes our products through a network of independent representatives and resellers.

USA Canada Hong Kong Vietnam

LAMPS AND BULBS



SPECIALTY LIGHTING



AURIO®
Light of life



INDOOR
OUTDOOR FIXTURES



COMMERCIAL
OUTDOOR FIXTURES

LED

PAR-Directional Lamps PAR20, PAR30 & PAR38

Aurio Lighting, Inc.

Indoor LED solutions for down lights, track lights and display lighting.

- Up to 80% energy saving
- Standard IEC dimension, easy for installation
- No Mercury, UV and IR radiation can be avoided
- Dimmable
- Rated Life 25,000 hours
- 3 year warranty

Air Flow Design: Our unique product design enhances better air circulation and cooling. This extends product life span and improves efficiency.




PAR20



PAR30



PAR38

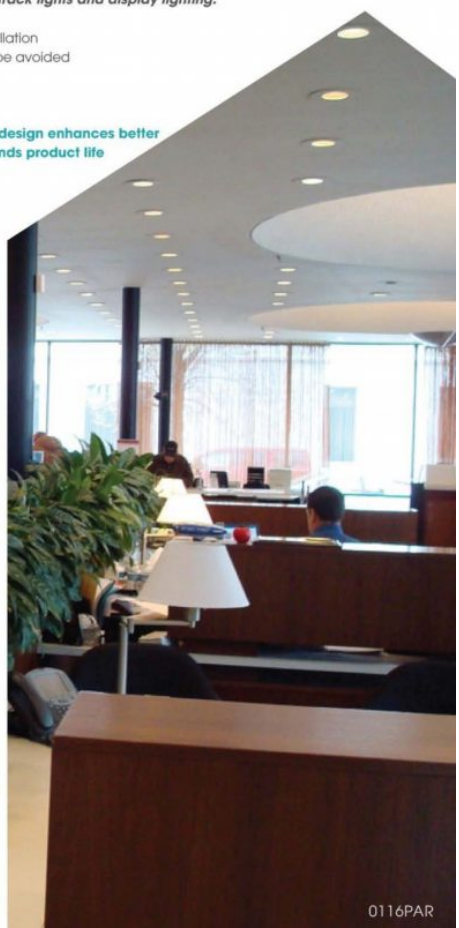

0116PAR



BR20



BR30



BR40

0116BR



LED BR-Flood Lamps BR20, BR30 & BR40

Aurio Lighting, Inc.

Indoor LED solutions for general residential and commercial applications.

- Up to 80% energy saving
- Standard IEC dimension, easy for installation
- Easy to upgrade recessed fixtures to LED
- Rated Life 25,000 hours
- Dimmable
- 3 year warranty

Air Flow Design: Our unique product design enhances better air circulation and cooling. This extends product life span and improves efficiency.



LED T8 TUBES

Aurio Lighting, Inc.

Dual Mode technology allows line voltage or Plug and Play with existing ballast

- Long life
- Rated Life 50,000 hours
- 5 year warranty



LED MR16

Aurio Lighting, Inc.

- Easy replacement for an existing halogen MR16
- 80% energy saving
- Chip on board design
- Dimmable
- Rated Life 25,000 hours
- 3 year warranty



GU5.3

Low Voltage MR16



GU10

Principal Voltage





Collection Light of **AURIO**



LED BULB A19

Aurio Lighting, Inc.

- Omni-directional with full light pattern
- Dimmable and Non-Dimmable
- 80% energy saving
- Rated Life 25,000 hours
- 3 year warranty



0116A19

GROW LIGHT

Aurio Lighting, Inc.

Click n Change – 2 Bulbs In 1
Our Grow Lamp integrated with Click n Change technology. By switching the On/Off light switch, our bulb can change from a "Standard 3000k mode" to a "Grow Light mode" and vice versa.
In Line Sequencing
When multiple GG bulbs are installed in the same circuit and controlled with single switch, GG bulbs will reset and synchronize with the same sequence as Grow Mode and follow with General Mode together.



LED COLOR BULB

Aurio Lighting, Inc.




Collection Light of life **AURIO®**



0116CB

AURIO® Collection Light of life

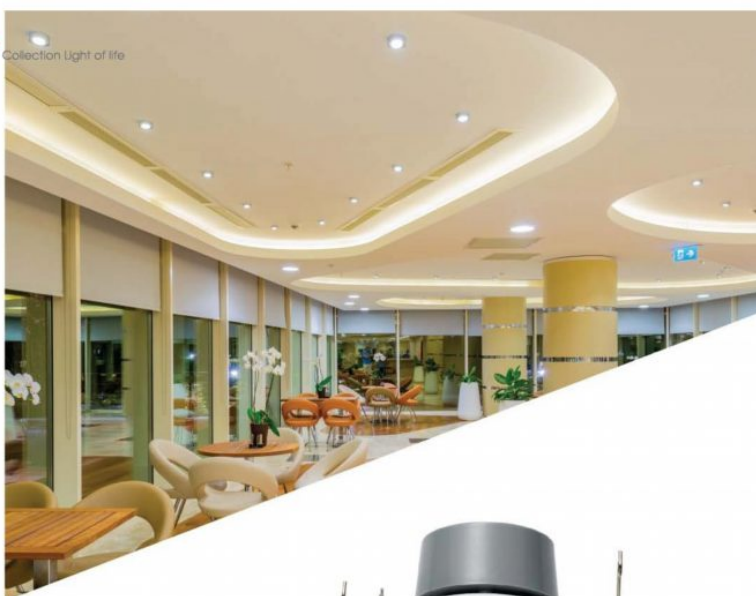

LED DOWN LIGHT


Aurio Lighting, Inc.

LED Recessed Retro-Fit DOWN LIGHT kit

- Title 24 compliant
- 80% energy saving
- Plug and Play wiring
- Dimmable
- Rated Life 25,000 hours
- 3 year warranty



0116DL

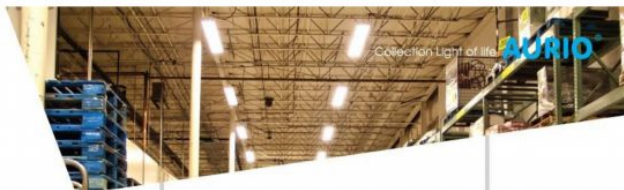

LED HIGH BAY

Aurio Lighting, Inc.

LED Linear HIGH BAY light fixture. Aurio Lighting offers a high performance LED luminaire that is ideal in manufacturing, warehousing, commercial and gymnastic applications

- Ideal mounting height 15 to 40 feet
- Rated Life 50,000 hours
- 5 year warranty



LED WALL PACK

Aurio Lighting, Inc.

Aurio Lighting WALL PACKS are architecturally designed for driveways, walkways and entryways

- Rated Life 50,000 hours
- 5 year warranty



0116WP



LED AREA LIGHT

Aurio Lighting, Inc.

Our Aurio Lighting designed LED AREA LIGHT is best suited for parking lots, auto dealerships, shopping centers and recreational areas

- Rated Life 50,000 hours
- 5 year warranty



0116AL

LED FLOOD LIGHT

Aurio Lighting, Inc.

Aurio Lighting has designed an innovated compact lighting solution with its LED FLOOD LIGHT. This compact format of LED FLOOD LIGHTS can be used in architectural landscaping, wall washing, and sign lighting

- Rated Life 50,000 hours
- 5 year warranty





LED TROFFERS

Aurio Lighting, Inc.

Aurio Lighting has designed a compatible LED TROFFER to be used in today's most popular ceiling systems. Common application use is for institutional and general office lighting

- Rated Life 50,000 hours
- 5 year warranty



0116TR

AURIO® Collection Light of life

LED STREET LIGHT

Aurio Lighting, Inc.



0116ST



AURIO®

AURIO LIGHTING, INC.

5027 Irwindale Ave., Suite 500, Irwindale, CA 91706 USA

Tel: (626)699-1500 Fax: (626)699-1300

E-mail: sales@auriolighting.com Website: auriolighting.com

LED

PAR - Directional Lamps
PAR20, PAR30 & PAR38

Indoor

Indoor LED solutions for down lights, track lights and display lighting.

- Up to 80% energy saving
- Standard IEC dimension, easy for installation
- No Mercury, UV and IR radiation can be avoided
- Dimmable
- Rated Life: 25,000 hours
- 3 year warranty




Air Flow Design

Our unique product design enhances better air circulation and cooling. This extends product life span and improves efficiency.



Model #	Manufacturer #	Type	Input Voltage	Beam Angle	Wattage	Dimmable	Lumen	Base	CCT	CRI	PF	Rated life
A-PAR20-30	AL-PAR20BAJ-T2	PAR20	120V	40°	8.5W	YES	500LM	E26	3000K	80	0.9	25,000hrs
A-PAR30-30	AL-PAR30BBE-T2	PAR30	120V	40°	14W	YES	800LM	E26	3000K	80	0.9	25,000hrs
A-PAR38-30	AL-PAR38BBK-T2	PAR38	120V	40°	19.5W	YES	1,300LM	E26	3000K	80	0.9	25,000hrs



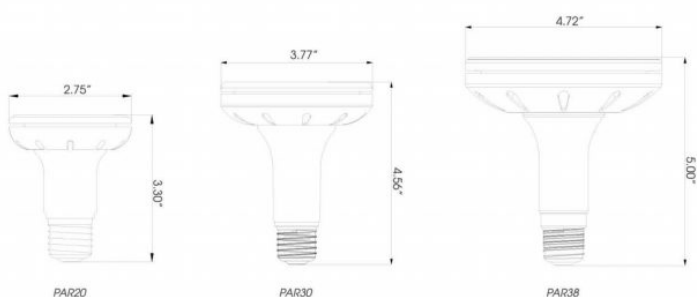

Dimensions and Weight

Model #	Manufacturer #	Type	Height	Diameter	Weight
A-PAR20-30	AL-PAR20BAJ-T2	PAR20	3.30"	2.75"	0.23lbs
A-PAR30-30	AL-PAR30BBE-T2	PAR30	4.56"	3.77"	0.41lbs
A-PAR38-30	AL-PAR38BBK-T2	PAR38	5.00"	4.72"	0.60lbs



www.aurlighting.com



0116PAR

LED

**BR - Flood Lamps
BR20, BR30 & BR40**

Indoor

LED solutions for general residential and commercial applications.

- Up to 80% energy saving
- Standard IEC dimension, easy for installation
- Easy to upgrade recessed fixtures to LED
- Rated Life: 25,000 hours
- Dimmable
- 3 year warranty



Traditional



AURIO

Air Flow Design

Our unique product design enhances better air circulation and cooling. This extends product life span and improves efficiency.



BR20



BR30



BR40

Model #	Manufacturer #	Type	Input	Beam	Wattage	Dimmable	Lumen	Base	CCT	CRI	PF	Rated life
			Voltage	Angle								
A-BR20-30	AL-BR20BAH-T2	BR20	120V	120°	7W	YES	450LM	E26	3000K	80	0.9	25,000hrs
A-BR30-30	AL-BR30BBC-T2	BR30	120V	120°	12W	YES	800LM	E26	3000K	80	0.9	25,000hrs
A-BR40-30	AL-BR40BBH-T2	BR40	120V	120°	17.5W	YES	1,300LM	E26	3000K	80	0.9	25,000hrs




www.auriolighting.com

3 YEAR WARRANTY



0116 BR

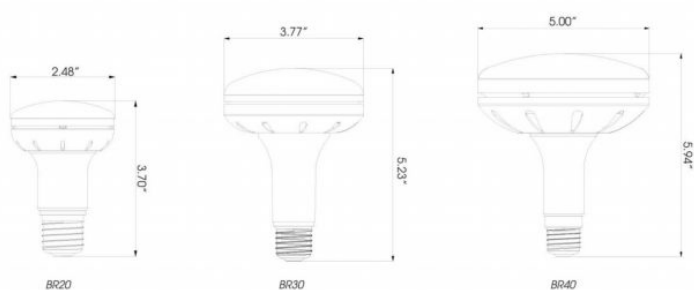

Dimensions and Weight

Model #	Manufacturer #	Type	Height	Diameter	Weight
A-BR20-30	AL-BR20BAH-T2	BR20	3.70"	2.48"	0.19lbs
A-BR30-30	AL-BR30BBC-T2	BR30	5.23"	3.77"	0.37lbs
A-BR40-30	AL-BR40BBH-T2	BR40	5.94"	5.00"	0.60lbs



www.aurlighting.com



0116 BR

LED T8 TUBES

Indoor

Dual Mode technology allows line voltage or Plug and Play with existing ballast

- Long life
- Rated Life: 50,000 hours
- 5 year warranty



A-T8-9-30 / A-T8-18-30

Model #	Size	Input Voltage	Wattage	Base	Lumen	CCT	CRI	PF	Rated life
A-T8-9-30	2FT	AC120-347	9W	G13	1,000LM	3000K	80	0.9	25,000hrs
A-T8-9-40	2FT	AC120-347	9W	G13	1,000LM	4000K	80	0.9	25,000hrs
A-T8-9-50	2FT	AC120-347	9W	G13	1,000LM	5000K	80	0.9	25,000hrs
A-T8-18-30	4FT	AC120-347	18W	G13	1,900LM	3000K	80	0.9	25,000hrs
A-T8-18-40	4FT	AC120-347	18W	G13	1,900LM	4000K	80	0.9	25,000hrs
A-T8-18-50	4FT	AC120-347	18W	G13	1,900LM	5000K	80	0.9	25,000hrs

Dimesions and Weight

Model #	Size	Length	Diameter	Weight
A-T8-9-30	2FT	24.09"	1.02"	0.44lbs
A-T8-9-40	2FT	24.09"	1.02"	0.44lbs
A-T8-9-50	2FT	24.09"	1.02"	0.44lbs
A-T8-18-30	4FT	47.71"	1.02"	0.79lbs
A-T8-18-40	4FT	47.71"	1.02"	0.79lbs
A-T8-18-50	4FT	47.71"	1.02"	0.79lbs



www.auriolighting.com

5 YEAR WARRANTY



011678

LED MR16

Indoor

- Easy replacement for an existing halogen MR16
- 80% energy saving
- Chip on board design
- Dimmable
- Rated Life 25,000 hours
- 3 year warranty




A-MR16-7.5-30




A-GU10-7-30

Model #	Type	Input Voltage	Wattage	Dimmable	Lumen	CCT	CRI	PF	Rated life
A-M16-7.5-30	MR16	12V	7.5W	YES	500LM	3000K	80	0.9	25,000hrs
A-GU10-7-30	GU10	120V	7W	YES	510LM	3000K	80	0.9	25,000hrs



A-MR16-7.5-30



A-GU10-7-30

Dimensions and Weight

Model #	Height	Diameter	Weight
A-M16-7.5-30	2.67"	1.95"	0.15lbs
A-GU10-7-30	2.67"	1.95"	0.15lbs



LED BULB A19

Indoor


- Omni-directional with full light pattern
- Dimmable and Non-Dimmable
- 80% energy saving
- Rated Life: 25,000 hours
- 3 year warranty



Model #	Input Voltage	Wattage	Dimmable	Lumen	CCT	CRI	PF	Rated life
A-A19-10-27-D	120V	10W	YES	800LM	2700K	80	0.9	25,000hrs
A-A19-10-30-D	120V	10W	YES	800LM	3000K	80	0.9	25,000hrs
A-A19-10-50-D	120V	10W	YES	800LM	5000K	80	0.9	25,000hrs
A-A19-9-27-ND	100-240V	9W	NO	810LM	2700K	80	0.9	25,000hrs
A-A19-9-30-ND	100-240V	9W	NO	810LM	3000K	80	0.9	25,000hrs
A-A19-9-50-ND	100-240V	9W	NO	810LM	5000K	80	0.9	25,000hrs

Dimensions and Weight

Model #	Length	Diameter	Weight
A-A19-10-27-D	4.25"	2.36"	0.22lbs
A-A19-10-30-D	4.25"	2.36"	0.22lbs
A-A19-10-50-D	4.25"	2.36"	0.22lbs
A-A19-9-27-ND	4.25"	2.36"	0.22lbs
A-A19-9-30-ND	4.25"	2.36"	0.22lbs
A-A19-9-50-ND	4.25"	2.36"	0.22lbs



www.auriolighting.com

3 YEAR WARRANTY



0116A19



Pre-set Color Sequence
A-A19-5-RGB

Model #	Type	Input Voltage	Wattage	Base	Color	Rated life
A-A19-5-R	A19	120V	5W	E26	RED	10,000hrs
A-A19-5-B	A19	120V	5W	E26	GREEN	10,000hrs
A-A19-5-G	A19	120V	5W	E26	BLUE	10,000hrs
A-A19-5-PU	A19	120V	5W	E26	PURPLE	10,000hrs
A-A19-5-Y	A19	120V	5W	E26	YELLOW	10,000hrs
A-A19-5-RGB	A19	120V	5W	E26	RGB	10,000hrs

Dimensions and Weight

Model #	Type	Height	Diameter	Weight
A-A19-5-R	A19	4.29"	2.36"	0.27lbs
A-A19-5-B	A19	4.29"	2.36"	0.27lbs
A-A19-5-G	A19	4.29"	2.36"	0.27lbs
A-A19-5-PU	A19	4.29"	2.36"	0.27lbs
A-A19-5-RGB	A19	4.29"	2.36"	0.27lbs



LED
DOWN LIGHT

Indoor

LED Recessed Retro-Fit DOWN LIGHT kit.

- Title 24 compliant
- 80% energy saving
- Plug and Play wiring
- Dimmable
- Rated Life: 25,000 hours
- 3 year warranty



A-DL-10-27 / A-DL-10-30 / A-DL-10-50
A-DL-12-27 / A-DL-12-30 / A-DL-12-50

Model #	Type	Input Voltage	Wattage	Dimmable	Lumen	CCT	CRI	PF	Rated life
A-DL-10-27	4inch	120V	10W	YES	600-700LM	2700K	80	0.9	25,000hrs
A-DL-10-30	4inch	120V	10W	YES	600-700LM	3000K	80	0.9	25,000hrs
A-DL-10-50	4inch	120V	10W	YES	600-700LM	5000K	80	0.9	25,000hrs
A-DL-12-27	5/6inch	120V	12W	YES	1,000LM	2700K	80	0.9	25,000hrs
A-DL-12-30	5/6inch	120V	12W	YES	1,000LM	3000K	80	0.9	25,000hrs
A-DL-12-50	5/6inch	120V	12W	YES	1,000LM	5000K	80	0.9	25,000hrs


Dimensions and Weight

Model #	Height	Diameter	Weight
A-DL-10-27	2.36"	5.03"	0.61lbs
A-DL-10-30	2.36"	5.03"	0.61lbs
A-DL-10-50	2.36"	5.03"	0.61lbs
A-DL-12-27	3.15"	7.48"	0.97lbs
A-DL-12-30	3.15"	7.48"	0.97lbs
A-DL-12-50	3.15"	7.48"	0.97lbs


Connector



E26



A-DL-10-27 / A-DL-10-30 / A-DL-10-50

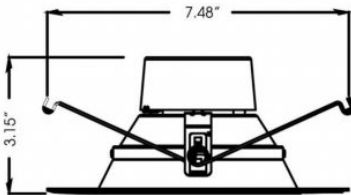

A-DL-12-27 / A-DL-12-30 / A-DL-12-50



LED
HIGH BAY

Indoor

LED Linear HIGH BAY light fixture. Aurio Lighting offers a high performance LED luminaire that is ideal in manufacturing, warehousing, commercial and gymnastic applications

- Ideal mounting height 15 to 40 feet
- Rated Life 50,000 hours
- 5 year warranty



A-LEDHB1-4-80-50



A-LEDHB1-4-120-50



A-LEDHB1-4-150-50

Model #	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-LEDHB1-4-80-50	AC120-305V	80W	8,000LM	5000K	80	0.9	50,000hrs.
A-LEDHB1-4-120-50	AC120-305V	120W	13,200LM	5000K	80	0.9	50,000hrs.
A-LEDHB1-4-150-50	AC120-305V	150W	17,600LM	5000K	80	0.9	50,000hrs.

Optional: Motion Sensor Available with UL approval




www.auriolighting.com

5 YEAR WARRANTY



0116HB01

LED High Bay

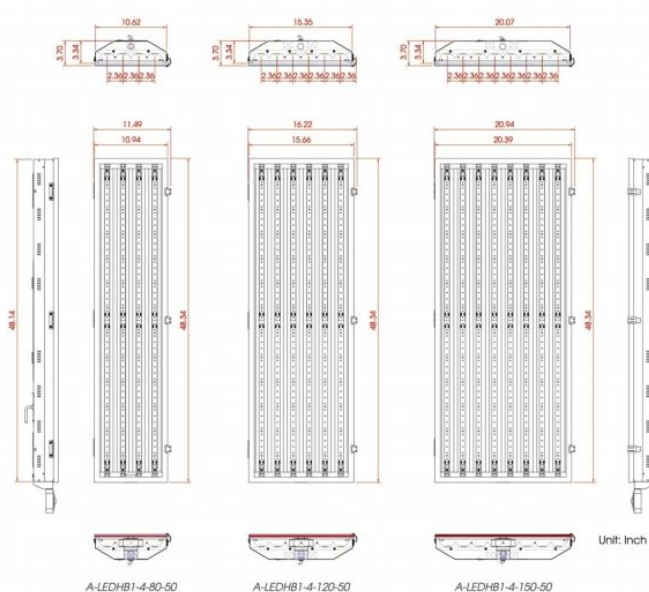

Dimensions and Weight

Model #	Length	Width	Height	Weight
A-LEDHB1-4-80-50	48.34"	10.94"	3.70"	18.32lbs
A-LEDHB1-4-120-50	48.34"	15.66"	3.70"	24.14lbs
A-LEDHB1-4-150-50	48.34"	20.39"	3.70"	28.65lbs



www.aurlighting.com



LED
HIGH BAY

Indoor

LED Linear HIGH BAY light fixture. Aurio Lighting offers a high performance LED luminaire that is ideal in manufacturing, warehousing, commercial and gymnastic applications

- Ideal mounting height 15 to 40 feet
- Rated Life 50,000 hours
- 5 year warranty



A-LEDHB2-4-160-50



A-LEDHB2-4-320-50



A-LEDHB2-2-80-50 / A-LEDHB2-2-160-50

Model #	Size	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-LEDHB2-2-80-50	2FT	AC120-305V	80W	8,000LM	5000K	80	0.9	50,000hrs.
A-LEDHB2-2-160-50	2FT	AC120-305V	160W	16,000LM	5000K	80	0.9	50,000hrs.
A-LEDHB2-4-160-50	4FT	AC120-305V	160W	16,000LM	5000K	80	0.9	50,000hrs.
A-LEDHB2-4-320-50	4FT	AC120-305V	320W	32,000LM	5000K	80	0.9	50,000hrs.

Optional: Motion Sensor Available with UL approval




www.auriolighting.com

5 YEAR WARRANTY



0116HB02

LED High Bay

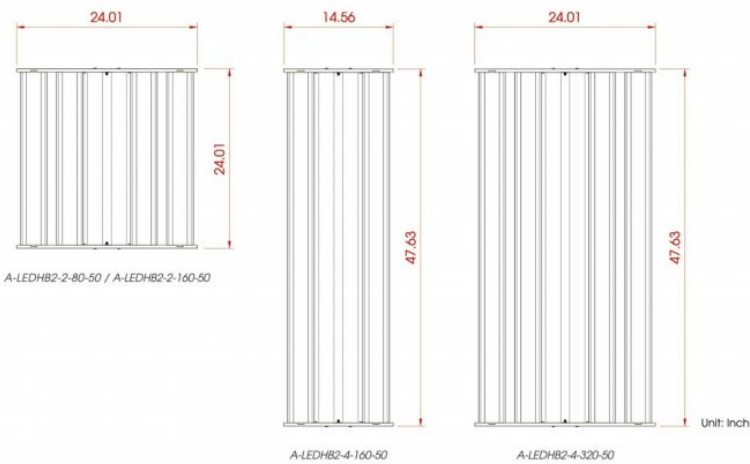

Dimensions and Weight

Model #	Size	Length	Width	Height	Weight
A-LEDHB2-2-80-50	2FT	24.01"	24.01"	2.87"	12.78lbs
A-LEDHB2-2-160-50	2FT	24.01"	24.01"	2.87"	12.78lbs
A-LEDHB2-4-160-50	4FT	47.63"	14.56"	2.87"	16.09lbs
A-LEDHB2-4-320-50	4FT	47.63"	24.01"	2.87"	24.91lbs



www.aurlighting.com



LED WALL PACK



A-WP-24-50* / A-WP-48-50*



A-WP-80-50* / A-WP-100-50* / A-WP-120-50* / A-WP-150-50*

Color Options:

Brown  Black 

Aurio Lighting WALL PACKS are architecturally designed for driveways, walkways, and entryways

- Rated Life: 50,000 hours
- 5 year warranty
- IP65

Model #	Manufacturer #	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated life
A-WP-24-50*	AL-WLCE-R	AC 90-305V	24W	2,400LM	5000K	70	0.9	50,000hrs
A-WP-48-50*	AL-WLEJ-R	AC 90-305V	48W	4,800LM	5000K	70	0.9	50,000hrs
A-WP-80-50*	AL-WLJA-R	AC 90-305V	80W	8,000LM	5000K	70	0.9	50,000hrs
A-WP-100-50*	AL-WLBAA-R	AC 90-305V	100W	10,000LM	5000K	70	0.9	50,000hrs
A-WP-120-50*	AL-WLBCA-R	AC 90-305V	120W	12,000LM	5000K	70	0.9	50,000hrs
A-WP-150-50*	AL-WLBFA-R	AC 90-305V	150W	15,000LM	5000K	70	0.9	50,000hrs

* BRN for brown * BLK for black




www.auriolighting.com


5 YEAR WARRANTY



0116WP

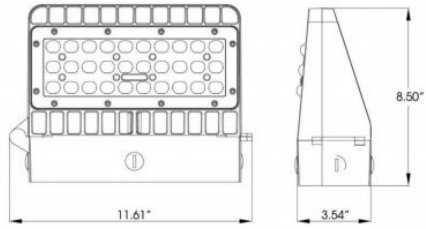

A-WP-24-50* / A-WP-48-50*

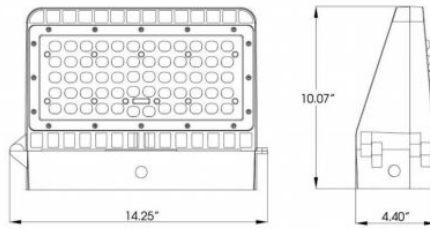

A-WP-80-50* / A-WP-100-50* / A-WP-120-50* / A-WP-150-50*

Dimensions and Weight

Model #	Manufacturer #	Length	Width	Height	Weight
A-WP-24-50*	AL-WLCE-R	11.61"	3.54"	8.50"	5.95lbs
A-WP-48-50*	AL-WLEJ-R	11.61"	3.54"	8.50"	5.95lbs
A-WP-80-50*	AL-WLJA-R	14.25"	4.40"	10.07"	12.12lbs
A-WP-100-50*	AL-WLBAA-R	14.25"	4.40"	10.07"	12.12lbs
A-WP-120-50*	AL-WLBCA-R	14.25"	4.40"	10.07"	12.12lbs
A-WP-150-50*	AL-WLBFA-R	14.25"	4.40"	10.07"	12.12lbs



www.aurlighting.com



0116WP

LED AREA LIGHT

Our Aurio Lighting designed LED AREA LIGHT is best suited for parking lots, auto dealerships, shopping centers and recreational areas.

- Rated Life: 50,000 hours
- 5 year warranty
- IP65

Color Options:

Black  Brown 




A-SB-24-50-X* / A-SB-48-50-X* / A-SB-80-50-X*




A-SB-200-50-X* / A-SB-300-50-X*


A-SB-100-50-X* / A-SB-150-50-X*



A Type Connector



B Type Connector



C Type Connector

Model #	Manufacturer #	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-SB-24-50-X*	AL-PLCE-S	AC 90-305V	24W	2,400LM	5000K	70	0.9	50,000hrs
A-SB-48-50-X*	AL-PLEJ-S	AC 90-305V	48W	4,800LM	5000K	70	0.9	50,000hrs
A-SB-80-50-X*	AL-PLJA-S	AC 90-305V	80W	8,000LM	5000K	70	0.9	50,000hrs
A-SB-100-50-X*	AL-PLBAA-S	AC 90-305V	100W	10,000LM	5000K	70	0.9	50,000hrs
A-SB-150-50-X*	AL-PLBFA-S	AC 90-305V	150W	15,000LM	5000K	70	0.9	50,000hrs
A-SB-200-50-X*	AL-PLCAA-R	AC 90-305V	200W	20,000LM	5000K	70	0.9	50,000hrs
A-SB-300-50-X*	AL-PLDAA-R	AC 90-305V	300W	30,000LM	5000K	70	0.9	50,000hrs

X = A, B or C for connector type
* BLK for black * BRN for brown




www.auriolighting.com

5 YEAR WARRANTY



0116AL

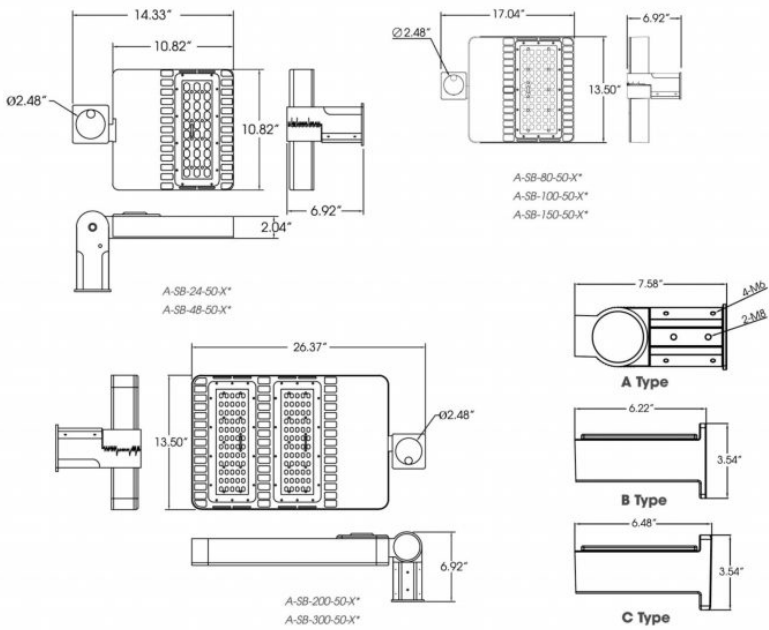

Dimensions and Weight

Model #	Manufacturer #	Connector	Length	Width	Height	Weight
A-SB-24-50-X*	AL-PLCE-S	Type A	14.33"	10.82"	6.92"	11.24lbs
A-SB-48-50-X*	AL-PLEJ-S	Type A	14.33"	10.82"	6.92"	11.24lbs
A-SB-80-50-X*	AL-PLJA-S	Type A	17.04"	13.50"	6.92"	17.19lbs
A-SB-100-50-X*	AL-PLBAA-S	Type A	17.04"	13.50"	6.92"	17.19lbs
A-SB-150-50-X*	AL-PLBFA-S	Type A	17.04"	13.50"	6.92"	17.19lbs
A-SB-200-50-X*	AL-PLCAA-R	Type A	26.37"	13.50"	6.92"	24.91lbs
A-SB-300-50-X*	AL-PLDAA-R	Type A	26.37"	13.50"	6.92"	24.91lbs



LED
FLOOD LIGHT



A-FL-30-50* / A-FL-50-50*
A-FL-80-50* / A-FL-100-50*



A-FL-140-50*



A-FL-210-50*



A-FL-280-50*

Color Options:

Silver  Black 

Aurio Lighting has designed an innovated compact lighting solution with its LED FLOOD LIGHT. This compact format of LED FLOOD LIGHTS can be used in architectural landscaping, wall washing, and sign lighting.

- Rated Life: 50,000 hours
- 5 year warranty
- IP 65

Model #	Manufacturer #	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-FL-30-50*	AL-FLDA-R	AC 90-305V	30W	3,000LM	5000K	70	0.9	50,000hrs
A-FL-50-50*	AL-FLFA-R	AC 90-305V	50W	5,000LM	5000K	70	0.9	50,000hrs
A-FL-80-50*	AL-FLJA-R	AC 90-305V	80W	8,000LM	5000K	70	0.9	50,000hrs
A-FL-100-50*	AL-FLBAA-R	AC 90-305V	100W	10,000LM	5000K	70	0.9	50,000hrs
A-FL-140-50*	AL-FLBEA-R	AC 90-305V	140W	14,000LM	5000K	70	0.9	50,000hrs
A-FL-210-50*	AL-FLCBA-R	AC 90-305V	210W	21,000LM	5000K	70	0.9	50,000hrs
A-FL-280-50*	AL-FLCJA-R	AC 90-305V	280W	28,000LM	5000K	70	0.9	50,000hrs

* SLV for silver * BLK for black




www.auriolighting.com

5 YEAR WARRANTY



0116FL

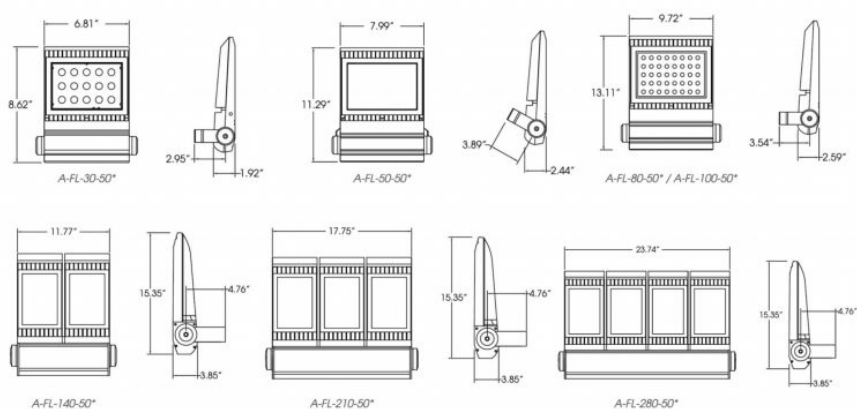

Dimensions And Weight

Model #	Manufacturer #	Length	Width	Height	Weight
A-FL-30-50°	AL-FLDA-R	6.81"	1.92"	8.62"	3.96lbs
A-FL-50-50°	AL-FLFA-R	7.99"	2.44"	11.29"	7.93lbs
A-FL-80-50°	AL-FLJA-R	9.72"	2.59"	13.11"	10.58lbs
A-FL-100-50°	AL-FLBAA-R	9.72"	2.59"	13.11"	10.58lbs
A-FL-140-50°	AL-FLBEA-R	11.77"	3.85"	15.35"	19.62lbs
A-FL-210-50°	AL-FLCBA-R	17.75"	3.85"	15.35"	27.64lbs
A-FL-280-50°	AL-FLCJA-R	23.74"	3.85"	15.35"	36.37lbs



www.aurilighting.com



0116FL

LED
TROFFER

Indoor

Aurio Lighting has designed a compatible LED TROFFER to be used in today's most popular ceiling systems. Common application use is for institutional and general office lighting.

- Rated Life 50,000 hours
- 5 year warranty



A-LEDT-22-20-50 / A-LEDT-22-30-50 / A-LEDT-22-40-50



A-LEDT-24-60-50 / A-LEDT-24-80-50

Model #	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-LEDT-22-20-50	AC120-305V	20W	2,100LM	5000K	80	0.9	50,000hrs.
A-LEDT-22-30-50	AC120-305V	30W	3,100LM	5000K	80	0.9	50,000hrs.
A-LEDT-22-40-50	AC120-305V	40W	4,200LM	5000K	80	0.9	50,000hrs.
A-LEDT-14-40-50	AC120-305V	40W	4,200LM	5000K	80	0.9	50,000hrs.
A-LEDT-24-60-50	AC120-305V	60W	6,300LM	5000K	80	0.9	50,000hrs.
A-LEDT-24-80-50	AC120-305V	80W	8,400LM	5000K	80	0.9	50,000hrs.




www.auriolighting.com

5 YEAR WARRANTY



0116TR

LED T8 Troffer

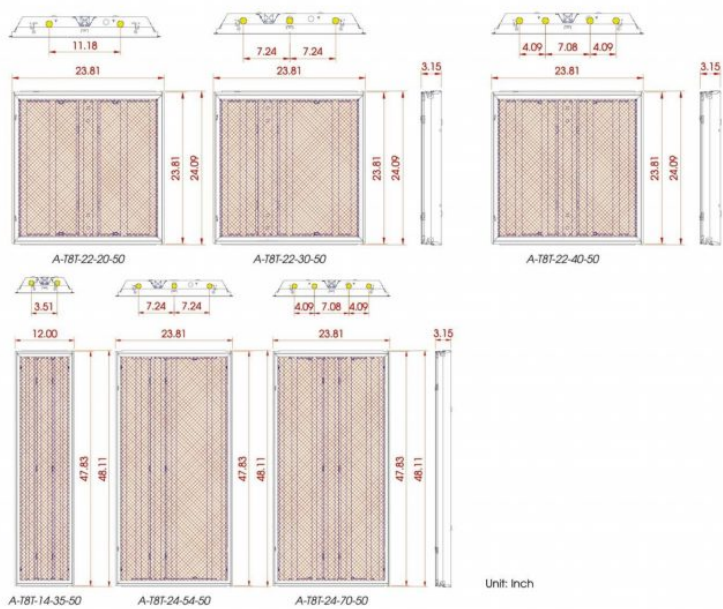

Dimensions and Weight

Model #	Size	Length	Width	Height	Weight
A-T8T-22-20-50	2x2	23.81"	23.81"	3.15"	13.44lbs
A-T8T-22-30-50	2x2	23.81"	23.81"	3.15"	13.11lbs
A-T8T-22-40-50	2x2	23.81"	23.81"	3.15"	12.89lbs
A-T8T-14-35-50	1x4	47.83"	12.00"	3.15"	13.99lbs
A-T8T-24-54-50	2x4	47.83"	23.81"	3.15"	20.39lbs
A-T8T-24-70-50	2x4	47.83"	23.81"	3.15"	24.91lbs



www.aurlighting.com



0116TR

LED
T8 TROFFER

Indoor

Aurio Lighting has designed a compatible T8 TROFFER to be used in today's most popular ceiling systems. Common application use is for institutional and general office lighting.

Fixture include LED T8

- Rated Life 50,000 hours
- 5 year warranty



A-T8T-22-20-50 / A-T8T-22-30-50 / A-T8T-22-40-50



A-T8T-24-54-50 / A-T8T-24-70-50

Model #	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-T8T-22-20-50	AC120-305V	20W	1,700LM	5000K	80	0.9	50,000hrs.
A-T8T-22-30-50	AC120-305V	30W	2,600LM	5000K	80	0.9	50,000hrs.
A-T8T-22-40-50	AC120-305V	40W	3,500LM	5000K	80	0.9	50,000hrs.
A-T8T-14-35-50	AC120-305V	35W	3,000LM	5000K	80	0.9	50,000hrs.
A-T8T-24-54-50	AC120-305V	54W	4,600LM	5000K	80	0.9	50,000hrs.
A-T8T-24-70-50	AC120-305V	70W	6,000LM	5000K	80	0.9	50,000hrs.




www.auriolighting.com

5 YEAR WARRANTY



0116TR

LED T8 Troffer

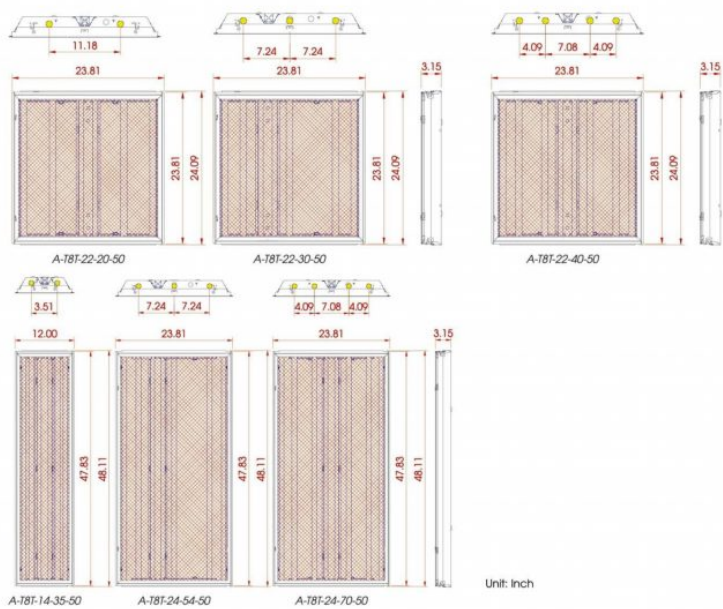

Dimensions and Weight

Model #	Size	Length	Width	Height	Weight
A-T8T-22-20-50	2x2	23.81"	23.81"	3.15"	13.44lbs
A-T8T-22-30-50	2x2	23.81"	23.81"	3.15"	13.11lbs
A-T8T-22-40-50	2x2	23.81"	23.81"	3.15"	12.89lbs
A-T8T-14-35-50	1x4	47.83"	12.00"	3.15"	13.99lbs
A-T8T-24-54-50	2x4	47.83"	23.81"	3.15"	20.39lbs
A-T8T-24-70-50	2x4	47.83"	23.81"	3.15"	24.91lbs



www.aurlighting.com



0116TR

LED
INDIRECT
LIGHTING

Indoor

Aurio Lighting has designed a LED INDIRECT LIGHTING to be used in today's most popular ceiling systems. Common application use is for institutional and general office lighting.




A-LEDT-22-30-50-CB / A-LEDT-24-75-50-CB


- Rated Life 50,000 hours
- 5 year warranty

Model #	Type	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-LEDT-22-30-50-CB	LED Indirect Lighting	AC120-305V	30W	2,600LM	5000K	80	0.9	50,000hrs.
A-LEDT-24-75-50-CB	LED Indirect Lighting	AC120-305V	75W	6,500LM	5000K	80	0.9	50,000hrs.

LED Indirect lighting



A-LEDT-22-30-50-CB



A-LEDT-24-75-50-CB

Unit: Inch

Dimensions and Weight

Model #	Size	Length	Width	Height	Weight
A-LEDT-22-30-50-CB	2x2	23.81"	23.81"	4.33"	13.45lbs
A-LEDT-24-75-50-CB	2x4	46.73"	23.81"	4.33"	26.90lbs



www.auriolighting.com

5 YEAR WARRANTY



01161L