

LED T8 TROFFER

↑ Indoor

Aurio Lighting has designed a compatible T8 TROFFER to be used in today's most popular ceiling systems. Common application use is for institutional and general office lighting.

Fixture include LED T8

- Rated Life 50,000 hours
- 5 year warranty




A-T8T-22-20-50 / A-T8T-22-30-50 / A-T8T-22-40-50



A-T8T-24-54-50 / A-T8T-24-70-50

Model #	Input Voltage	Wattage	Lumen	CCT	CRI	PF	Rated Life
A-T8T-22-20-50	AC120-305V	20W	1,700LM	5000K	80	0.9	50,000hrs.
A-T8T-22-30-50	AC120-305V	30W	2,600LM	5000K	80	0.9	50,000hrs.
A-T8T-22-40-50	AC120-305V	40W	3,500LM	5000K	80	0.9	50,000hrs.
A-T8T-14-35-50	AC120-305V	35W	3,000LM	5000K	80	0.9	50,000hrs.
A-T8T-24-54-50	AC120-305V	54W	4,600LM	5000K	80	0.9	50,000hrs.
A-T8T-24-70-50	AC120-305V	70W	6,000LM	5000K	80	0.9	50,000hrs.

LED T8 Troffer

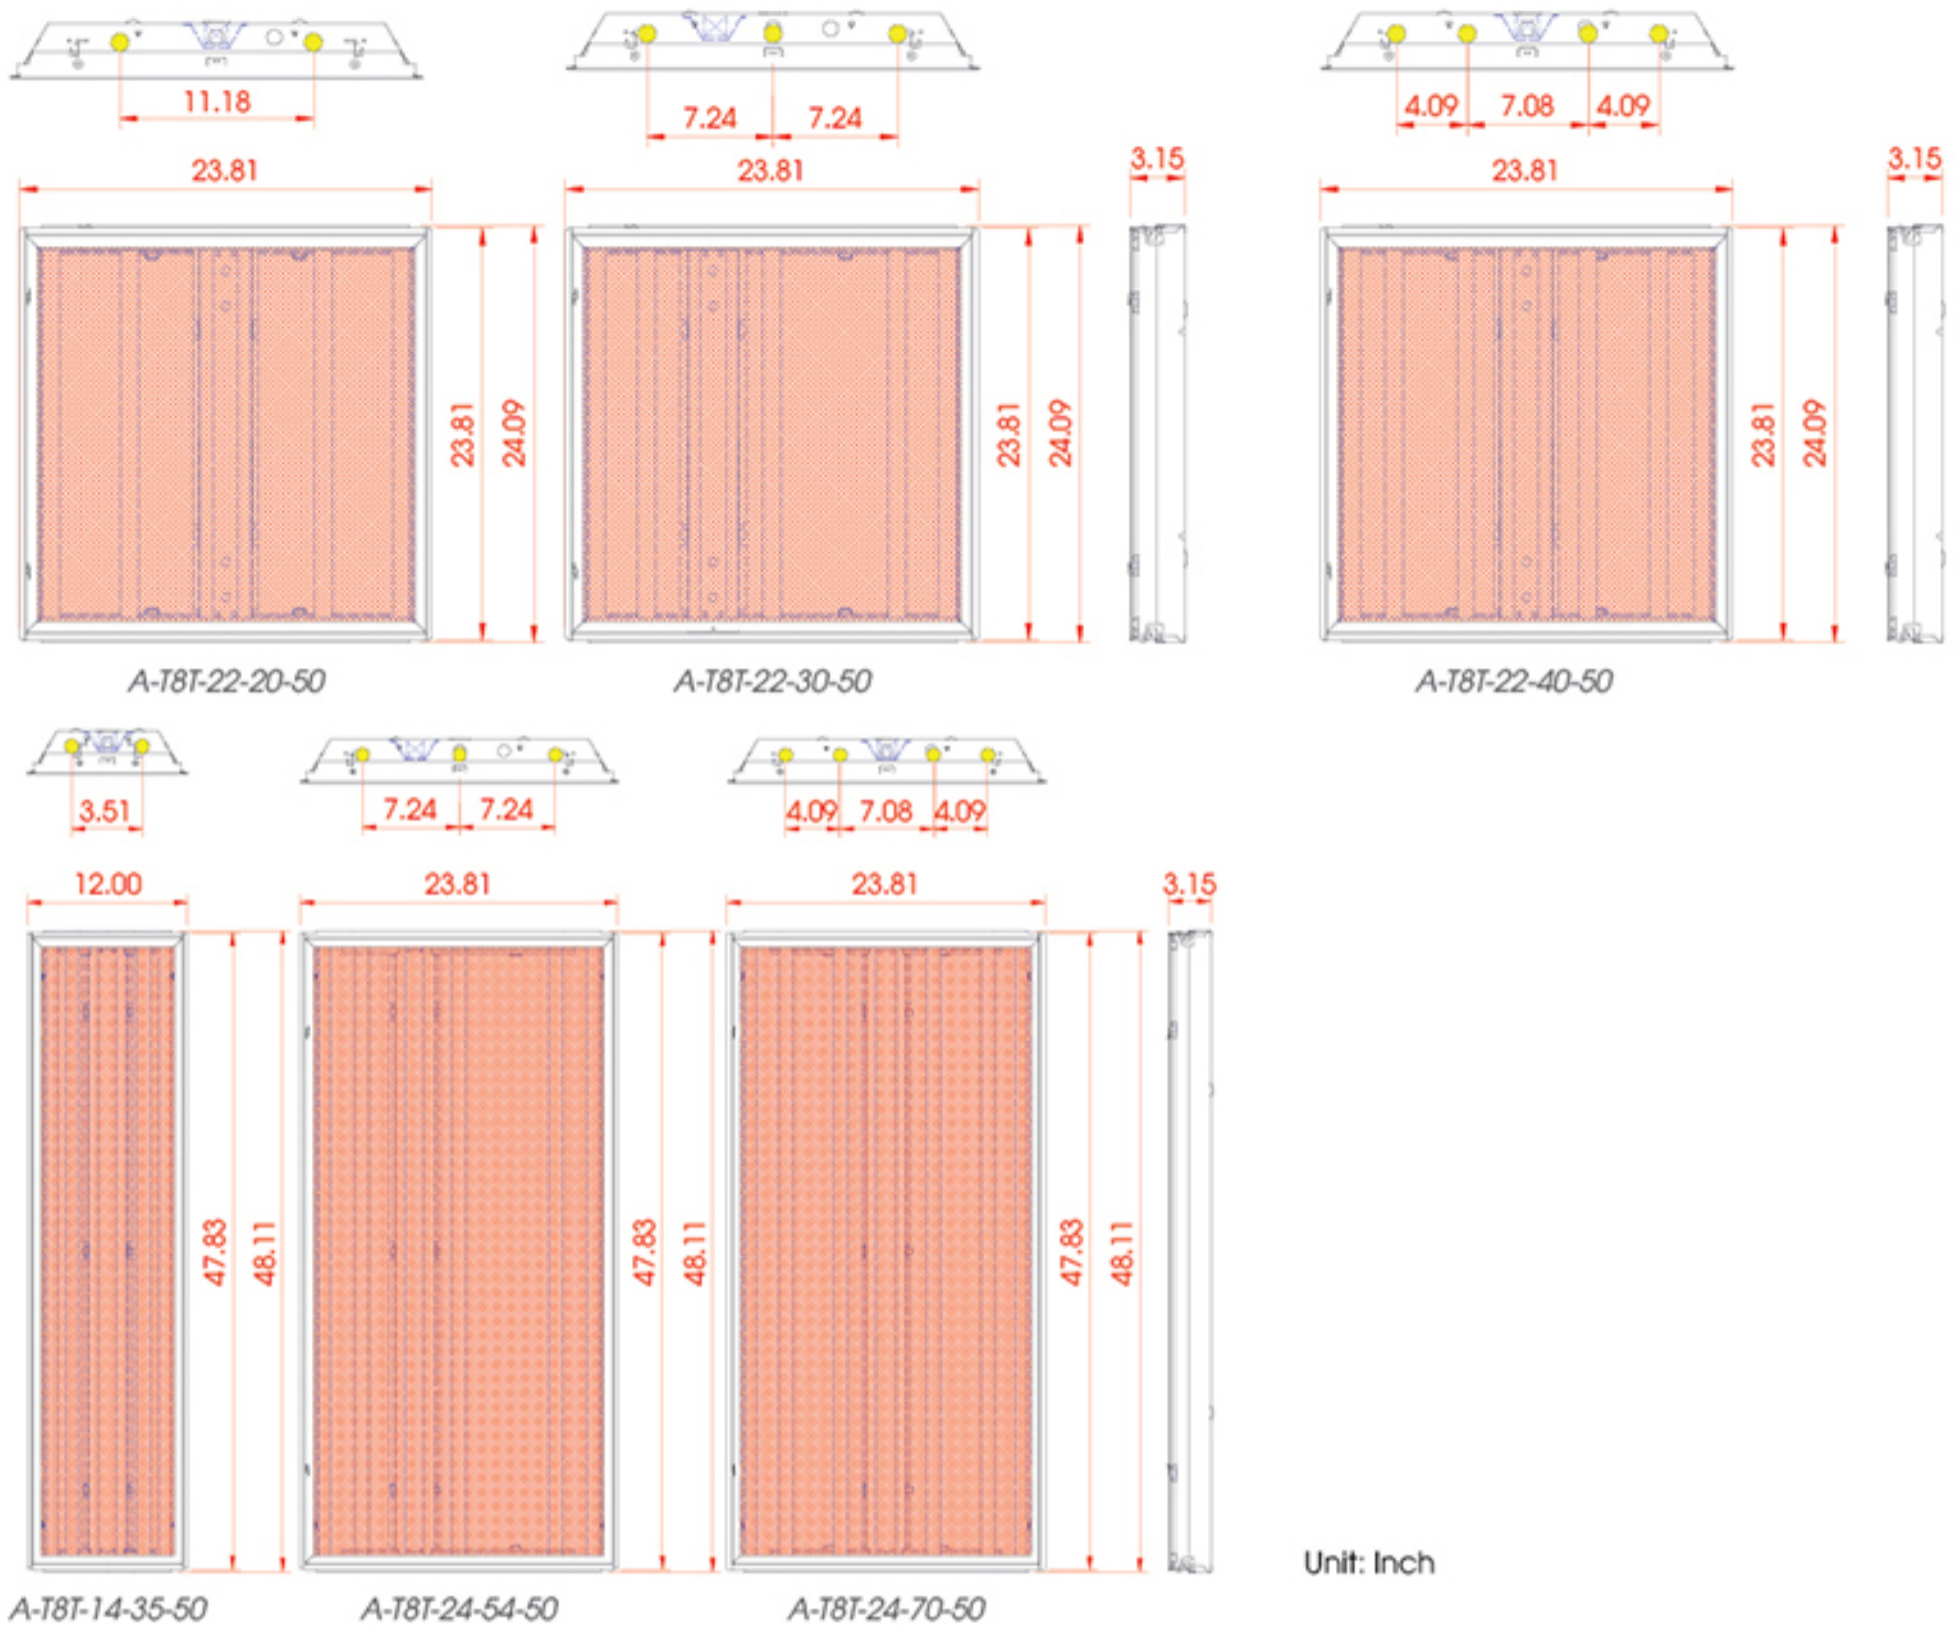

Dimensions and Weight

Model #	Size	Length	Width	Height	Weight
A-T8T-22-20-50	2x2	23.81"	23.81"	3.15"	13.44lbs
A-T8T-22-30-50	2x2	23.81"	23.81"	3.15"	13.11lbs
A-T8T-22-40-50	2x2	23.81"	23.81"	3.15"	12.89lbs
A-T8T-14-35-50	1x4	47.83"	12.00"	3.15"	13.99lbs
A-T8T-24-54-50	2x4	47.83"	23.81"	3.15"	20.39lbs
A-T8T-24-70-50	2x4	47.83"	23.81"	3.15"	24.91lbs

